


Weldon toolholder HSK63F and SK30 without grooves and notches

Item-No.	Taper size and form DIN 69893-6	Ø H5 [mm]	A [mm]	D2 [mm]	D3 [mm]	ML 1	Thread M
63F.706.065	HSK63 Form F	6	65	15	25	18	M6
63F.708.065	HSK63 Form F	8	65	18	28	18	M8
63F.710.065	HSK63 Form F	10	65	25	35	20	M10
63F.712.065	HSK63 Form F	12	65	30	42	22,5	M12
63F.712.080	HSK63 Form F	12	80	30	42	22,5	M12
63F.714.080	HSK63 Form F	14	80	36	48	22,5	M14
63F.716.080	HSK63 Form F	16	80	36	48	24	M14
63F.720.080	HSK63 Form F	20	80	40	52	25	M16

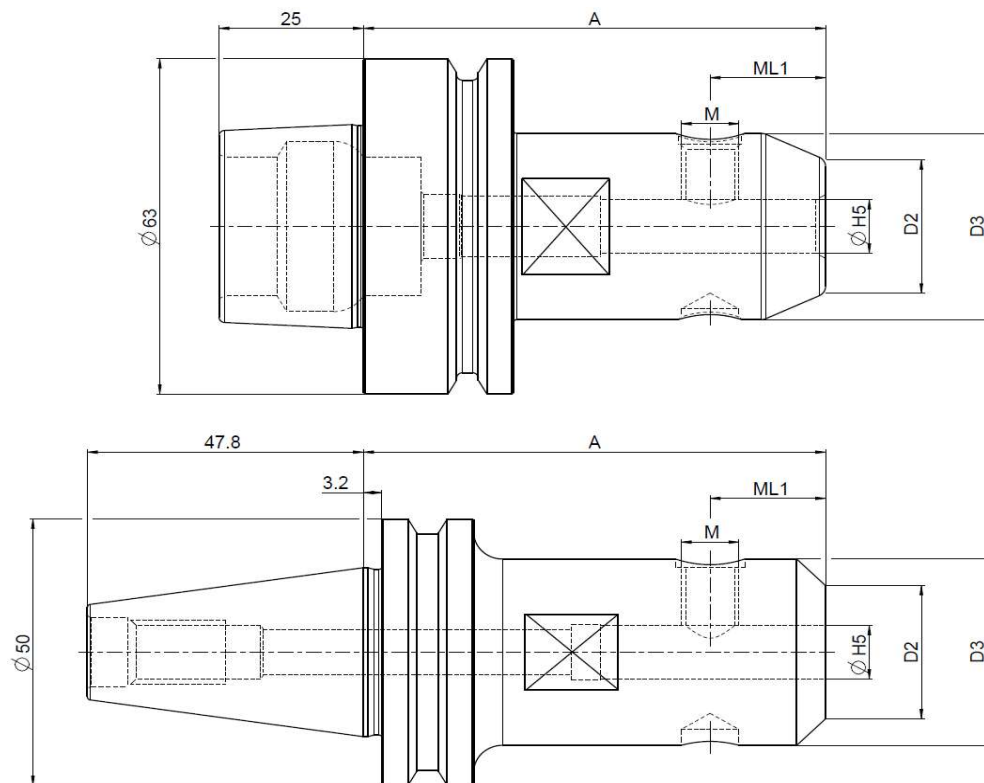

Artikel-Nr.	Taper size and form DIN 69871	Ø H5 [mm]	A-Maß [mm]	D2 [mm]	D3 [mm]	ML1	Gewinde M
30S.706.050	SK30	6	50	15	25	18	6
30S.706.110	SK30	6	110	15	25	18	6
30S.708.050	SK30	8	50	18	28	18	8
30S.708.110	SK30	8	110	18	28	18	8
30S.710.050	SK30	10	50	25	35	20	10
30S.710.110	SK30	10	110	25	35	20	10